

WHEEL LOADER

SZ910



SZ910(Low TYPE)



Model	SZ910	SZ910(Low TYPE)
Operating weight	2350KG	2,850KG
Rated load	1000KG	1,000KG
Bucket capacity	0.5m ³	0.5m ³
Bucket width	1,590mm	1,500mm
Max. Dump height	3,100mm	2,400mm
Engine power	18KW(25hp)	42KW(57hp)
Wheel drive	4X4	4x4
Tire	12-16.5	20.5-16
Max.travel speed	0-30km/h	0-30km/h
Gradeability	25°	30°
Dimensions	4,070*1,610*2,580mm	4,200*1,470*2,150mm

SZ915(Low TYPE)



SZ915



Model	SZ915(Low TYPE)	SZ915
Operating weight	3,100KG	3,800KG
Rated load	1,500KG	1,500KG
Bucket capacity	0.75m ³	0.8m ³
Bucket width	1,800mm	1,800mm
Max. Dump height	3,100mm	3,200mm
Engine power	42KW(57hp)	42KW(57hp)
Wheel drive	4x4	4x4
Tire	20.5-16	20.5-16
Max.travel speed	0-30km/h	0-30km/h
Gradeability	30°	30°
Dimensions	5,200*1,850*2,150mm	5,200*1,850*2,700mm

SZ916



SZ918



Model	SZ916	SZ918
Operating weight	4,000KG	4,000KG
Rated load	1,600KG	1,800KG
Bucket capacity	0.8m ³	0.9m ³
Bucket width	1,800mm	1,800mm
Max. Dump height	3,200mm	3,200mm
Engine power	42KW(57hp)	60KW(81.6hp)
Wheel drive	4x4	4x4
Tire	20.5-16	20.5-16
Max.travel speed	0-30km/h	0-30km/h
Gradeability	30°	30°
Dimensions	5,400*1,850*2,700mm	5,400*1,850*2,700mm

SZ920



SZ920(Low TYPE)



Model	SZ920	SZ920(Low TYPE)
Operating weight	5,000KG	4,000KG
Rated load	2,000KG	2,000KG
Bucket capacity	1.0m ³	1.0m ³
Bucket width	2,000mm	1,800mm
Max. Dump height	3,500mm	3,100mm
Engine power	78KW(106hp)	78KW(106hp)
Wheel drive	4x4	4x4
Tire	16/70-20	20.5-16
Max.travel speed	0-30km/h	0-30km/h
Gradeability	30°	30°
Dimensions	5,650*2,000*2,750mm	5,200*1,850*2,150mm

SZ925



SZ928



Model	SZ925	SZ928
Operating weight	5,800KG	5,800KG
Rated load	2,500KG	2,800KG
Bucket capacity	1.3m ³	1.4m ³
Bucket width	2,000mm	2,200mm
Max. Dump height	3,500mm	3,600mm
Engine power	78KW(106hp)	96KW(130.56hp)
Wheel drive	4x4	4x4
Tire	16/70-20	16/70-24
Max.travel speed	0-36km/h	0-36km/h
Gradeability	30°	30°
Dimensions	5,650*2,000*2,750mm	6,400*2,300*2,950mm

SZ930A



SZ930B



Model	SZ930A	SZ930B
Operating weight	6,500KG	7,200KG
Rated load	3,000KG	3,000KG
Bucket capacity	1.5m ³	1.8m ³
Bucket width	2,200mm	2,300mm
Max. Dump height	3,600mm	3,800mm
Engine power	96KW(130.56hp)	92KW(125hp)
Wheel drive	4x4	4x4
Tire	16/70-24	17.5-25
Max.travel speed	0-36km/h	0-40km/h
Gradeability	30°	30°
Dimensions	6,400*2,300*2,950mm	7,700*2,380*3,200mm



SZ940



SZ950



Model	SZ940	SZ950
Operating weight	11,200KG	16,700KG
Rated load	4,000KG	5,000KG
Bucket capacity	2.0m ³	3.0m ³
Bucket width	3,200mm	3,200mm
Max. Dump height	3,200mm	3,200mm
Engine power	129KW(175hp)	162KW(220hp)
Wheel drive	4x4	4x4
Tire	20.5-25	23.5-25
Max.travel speed	0-38kg/h	0-38kg/h
Gradeability	30°	30°
Dimensions	7,560*2,440*3,300mm	7,763 × 3,020 × 3,450mm

SZ960



Model	SZ960
Operating weight	20,000KG
Rated load	6,000KG
Bucket capacity	3.6m ³
Bucket width	3,300mm
Max. Dump height	3,150mm
Engine power	175KW(238hp)
Wheel drive	4x4
Tire	26.5-25
Max.travel speed	0-38kg/h
Gradeability	30°
Dimensions	8,540 × 3,100 × 3,550mm

TELESCOPIC LOADER

SH180T



SH280T



Model	SH180T	SH280T
Rated Power	17.75KW	25KW
Rated Load	600KG	1,000KG
Bucket Capacity	0.3m ³	0.5m ³
Bucket Width	1,200mm	1,500mm
Max. Dump Height	2,800mm	3,500mm
Min. Dump Height	1,085mm	2,600mm
Wheel Drive	4x4	4x4
Wheel Tread	890mm	1230mm
Wheel Base	1507mm	2250mm
Tire	10.0/75-15.3	31*15.5-15
Travel Speed	12km/h	20km/h
Gradeability	25°	30°
Operating Weight	2100KG	2300KG
Dimensions	3,820*1,260*2,310mm	4,600*1,600*2,300mm

ST1500



ST1800



Model	ST1500	ST1800
Rated power	37KW	42KW
Rated load	1,500KG	1,800KG
Bucket capacity	0.7m ³	0.8m ³
Bucket width	1,700mm	1,800mm
Max. Dump height	4,500mm	4,500mm
Min. Dump height	3,500mm	3,500mm
Wheel drive	4x4	4x4
Wheel tread	1,500mm	1,550mm
Wheel base	2,500mm	2,500mm
Tire	20.5/70-16	23.5/70-16
Travel speed	0-25km/h	0-30km/h
Gradeability	30°	30°
Operating weight	4,200KG	4,500KG
Dimensions	5,800*1,800*2,700mm	5,800*1,900*2,680mm



Model	ST2000	ST2500
Rated power	65KW	76KW
Rated load	2,000KG	2,500KG
Bucket capacity	1.0m ³	1.25m ³
Bucket width	2,000mm	2,100mm
Max. Dump height	4,400mm	4,400mm
Min. Dump height	3,400mm	3,400mm
Wheel drive	4x4	4x4
Wheel tread	1,600mm	1,600mm
Wheel base	2,550mm	2,550mm
Tire	16/70-20	16/70-24
Travel speed	0-30km/h	0-30km/h
Gradeability	30°	30°
Operating weight	5,500KG	6,000KG
Dimensions	6,500*2,000*2,860mm	6,500*2,000*2,860mm




Model	ST3000	ST3500
Rated power	85KW	92KW
Rated load	3,000KG	3,500KG
Bucket capacity	1.5m ³	1.75m ³
Bucket width	2,200mm	2,300mm
Max. Dump height	5,000mm	5,300mm
Min. Dump height	3,800mm	3,900mm
Wheel drive	4x4	4x4
Wheel tread	1,750mm	1,750mm
Wheel base	2,800mm	2,800mm
Tire	16/70-24	17.5-25
Travel speed	0-30km/h	0-30km/h
Gradeability	30°	30°
Operating weight	7,000KG	8,000KG
Dimensions	7,200*2,200*3,000mm	7,500*2,280*3,000mm


ST4000



Model	ST4000
Rated power	129KW
Rated load	4,000KG
Bucket capacity	2.0m ³
Bucket width	2,300mm
Max. Dump height	5,400mm
Min. Dump height	4,000mm
Wheel drive	4x4
Wheel tread	1,825mm
Wheel base	2,845mm
Tire	20.5-25
Travel speed	0-30km/h
Gradeability	30°
Operating weight	10,000KG
Dimensions	7,800*3,230*2,300mm

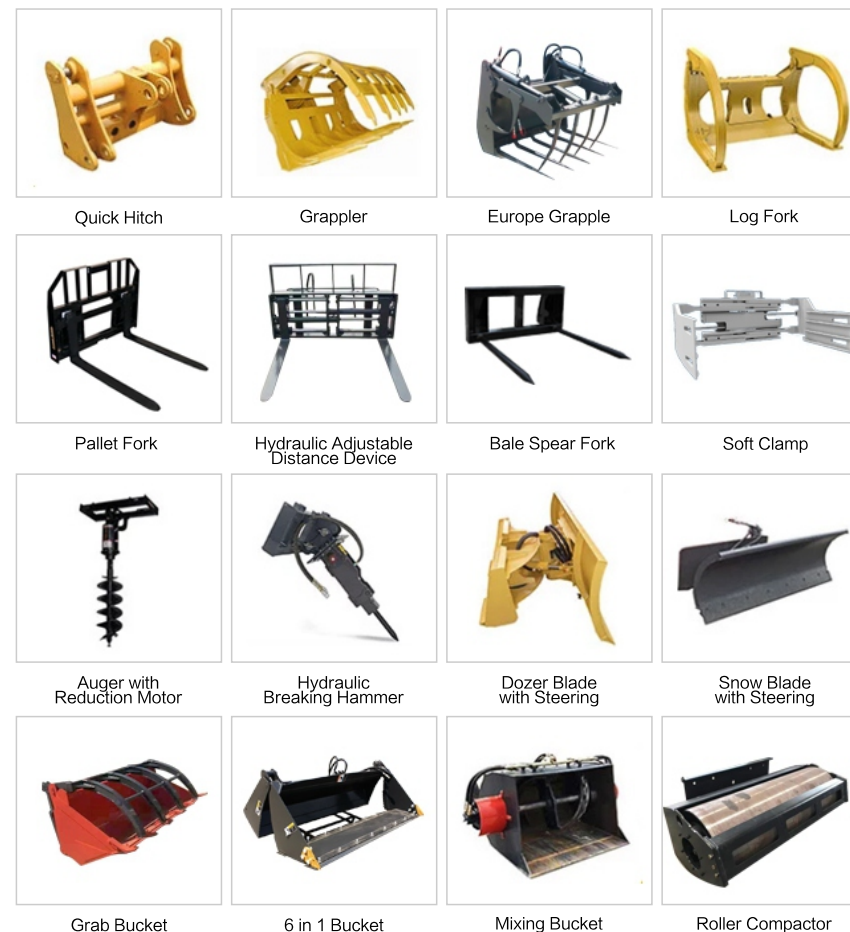

OPTSDNAL ATTACHMENTS

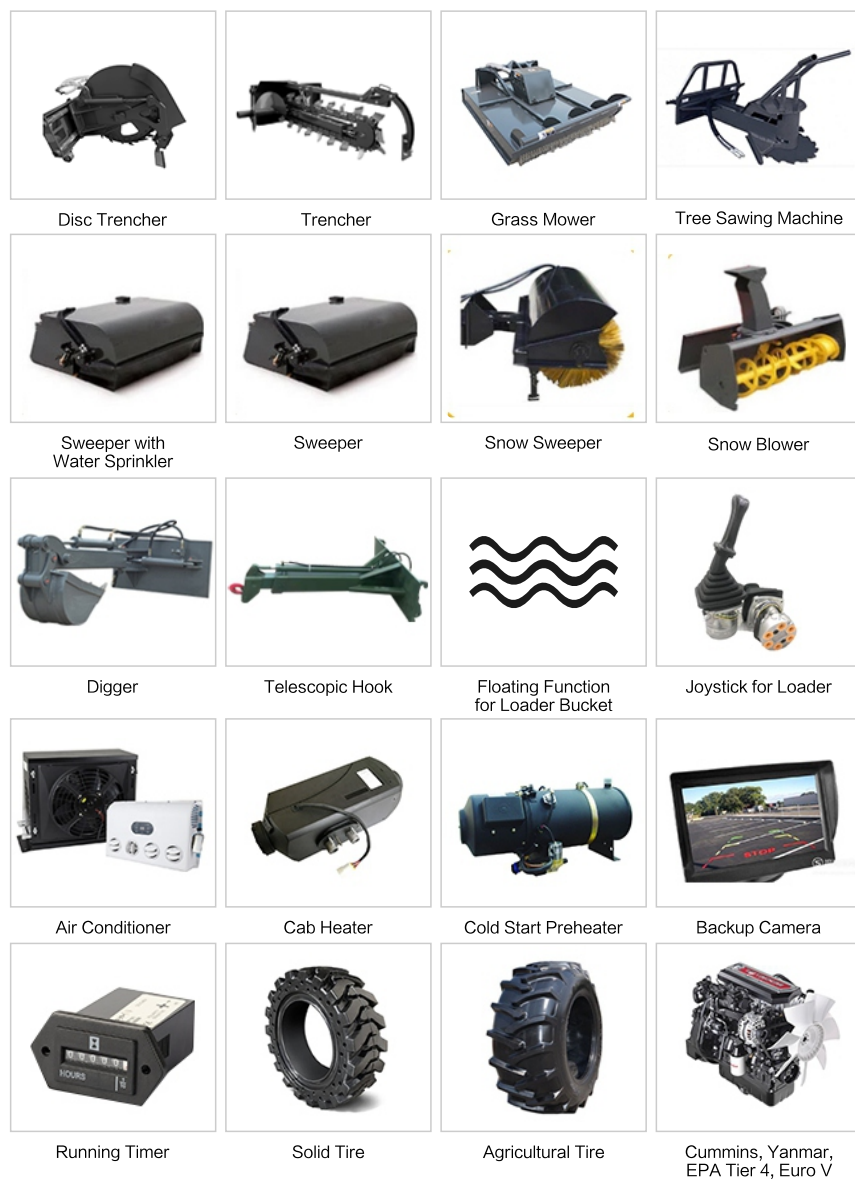

SHIPPING

